

## CADC600P(N)

### 600TVL HIGH RESOLUTION DOME CAMERA

Honeywell Vista CADC600P(N) dome camera delivers high resolution images with more than 600TV lines to offer accurate color reproduction performance. Featuring Digital Noise Reduction (DNR) and day/night switching functions, the CADC600P(N) guarantees high quality image delivery in various environments. 2.5mm / 3.8mm / 6.0mm fixed lenses are available for installing the best solution for different surveillance requirements.

Operation is simple with the OSD menu. Functions such as backlight compensation, auto white balance, motion detection and privacy masking can be adjusted in just a few steps. Designed with 3-axis rotation, it is easy to change the vertical angle, horizontal angle as well as horizontal position of the CADC600P(N) that, it can be installed easily with ceiling mount or wall mount.


#### Market Opportunities

Honeywell Vista CADC600P(N) is designed for high quality surveillance applications at an economical price. With 600TV line high resolution, Day/Night switching and DNR functions, the CADC600P(N) camera is ideal for different indoor installations such as hotels, shopping malls, hospitals, residential areas, commercial buildings, education facilities and so on.

#### FEATURES

- Ultra High Resolution: 600 TVL(Color),650TVL (B/W)
- Fixed lens 2.5mm, 3.8mm, 6.0mm
- 0.05 Lux (Color), 0.03 Lux (B/W), F1.2
- Auto White Balance, AGC, DNR
- BLC, Flickerless
- Motion Detection, Privacy Masking, Mirror Function
- OSD menu
- 3-Axis Movement for Lens Rotation
- 12VDC & 24VAC Dual Power

#### DIMENSIONS

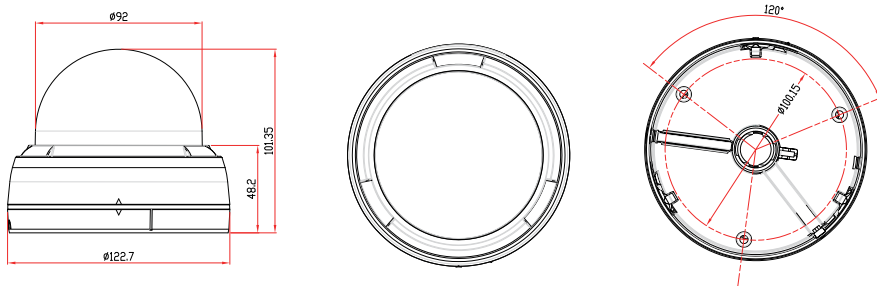

# CADC600P(N)

www.black.honeywell.com

## 600TVL HIGH RESOLUTION DOME CAMERA

### SPECIFICATIONS

Model	CADC600P-25 (-38 -60 )	CADC600N-25 (-38 -60 )
Signal System	PAL	NTSC
Image Sensor	1/3" Sony Super HAD CCD	
Total Pixels	795(H) x 596(V) 470K	811(H) x 508(V) 410K
Effective Pixels	752(H) x 582(V) 440K	768(H) x 494(V) 380K
Horizontal Resolution	600 TV Lines (B/W 650TV Lines)	
Electronic Shutter Speed	1/50~1/120,000	1/60~1/120,000
Video Output Level	1.0 Vp-p (75Ω, Composite)	
S/N Ratio	More than 50dB (AGC Off)	
Lens	Fixed lens 2.5mm, 3.8mm, 6.0mm	
Min. Illumination	0.05 Lux (Color), 0.03 Lux (B/W), F1.2, 30IRE	
Day & Night	Electronic Day/Night (EDN)	
Digital Noise Reduction	Low, Middle, High, Off	
White Balance	ATW, Manual, Push	
AGC	On/Off	
BLC	Off, Low, Middle, High	
Flickerless	On/Off	
OSD Menu	English, Chinese	
Mirror Function	Horizontal	
Privacy Zone	On/Off (4 Programmable Zone)	
Motion Detection	On/Off (4 Programmable Zone)	
Power Voltage	12VDC & 24VAC	
Power Consumption	Max. 2.2W	
Dimensions	Φ123(D) x 101(H) mm	
Weight (Net)	Approx. 336g	
Regulatory	CE, C-tick	

### ORDERING

CADC600P-25 CADC600P-38 CADC600P-60	High Resolution Dome Camera, 600 TVL, 0.05 Lux/F1.2 , EDN, Optional 2.5mm, 3.8 mm, 6.0mm, PAL, 12 VDC & 24 VAC
CADC600N-25 CADC600N-38 CADC600N-60	High Resolution Dome Camera, 600 TVL, 0.05 Lux/F1.2 , EDN, Optional 2.5mm, 3.8 mm, 6.0mm, NTSC, 12 VDC & 24 VAC

For more information:

Security Hong Kong  
Security Australia National Sales Hotline  
Security India

Tel: (852) 2405 2323  
Tel: 1300 765 532  
Tel: (91) 127 4975000

www.black.honeywell.com  
security.black@honeywell.com

**Honeywell Security Group**  
Automation & Control Solutions  
Honeywell International Inc.  
www.security.honeywell.com

Aug 2011  
© 2011 Honeywell International Inc.

**VISTA**  
**Honeywell**